



Installation Instructions

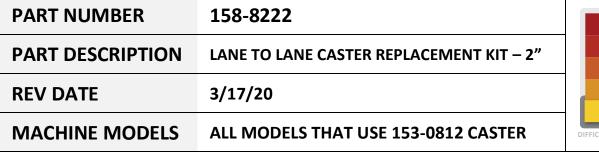



TOOLS NEEDED	PARTS	
(2) 9/16" wrench	153-0812A 153-6421S 164-6283	
TECHNICAL NOTE		

TECHNICAL NOTE

Please thoroughly read the instructions prior to performing the installation of this assembly. To avoid any potential problems, if at any time during the process you have a question, stop and contact our Tech Support department at the numbers listed below.

STEPS

Please thoroughly read the instructions prior to performing the installation of this assembly. To avoid any potential problems, if at any time during the process you have a question, stop and contact our Tech Support department at the numbers listed below

- 1. With the lane machine standing in the transport position, remove the old caster with your (2) 9/16" wrenches.
- 2. Take the new 153-2068 bolt and slide a washer onto it.
- 3. Put bolt through the caster bracket and slide the spacer onto the other side.

Rev. 9/20









4.	Place the 164-6283 sleeve inside the caster and put the new caster onto the bolt. Fasten with the washer, lock washer and jam nut against the sleeve flange.