


Installation Instructions

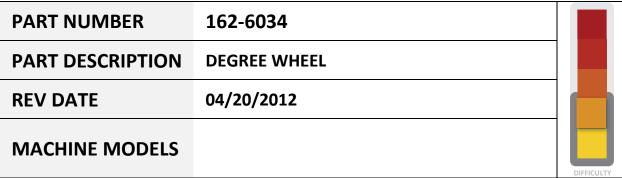

TOOLS NEEDED	PARTS
9/16" Socket and Ratchet	162-6034S (1) DEGREE WHEEL 162-2001 (6) 3/8-16 X 1" HEX HEAD CAP SCREW 153-2016 (6) 3/8" LOCKWASHER

TECHNICAL NOTE

Please thoroughly read the instructions prior to performing the installation of this assembly. To avoid any potential problems, if at any time during the process you have a question, stop and contact our Tech Support department at the numbers listed below.

STEPS

Replaces 12-100044-000 Ring

Steps

- 1. With pinsetter at zero degrees, remove the six bolts mounting the old ring to the rake lift cam hub.
- 2. Install the new Degree Wheel to the rake lift cam hub with the **0/0** near the twelve o'clock position.
- Prior to performing a rake sweep pattern adjustment, scribe a line on your rake lift cam that correlates to any of the markings on the Degree Wheel. This scribed line will assist you in determing the amount of cam movement when performing this adjustment.



*Reference your pinsetter service manual for complete rake sweep height and pattern adjustment.







