



Rev. 03-13-2020


## Turnbar 2 Part No. PPP-T2

Remove existing turn pan cam.

Place turnbar on turn pan - reuse original bolt and nut in turn pan hole [1].

Position post end [2] of turnbar on curvature of outer turn pan rim then tighten bolt [1]. When necessary, reposition post by pushing bar until post end lines up on rim of turn pan as shown.

Use a center punch to indent turn pan thru turnbar extension mounting hole. Drill 5/16" hole and install bolt.

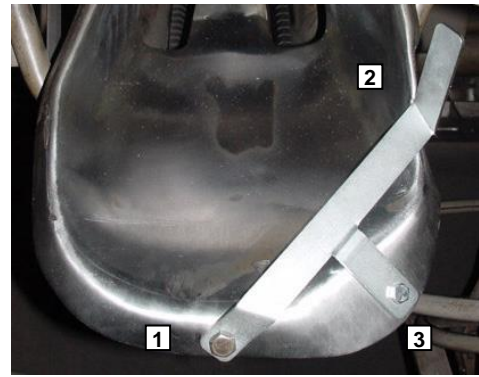

Using turnbar without extension mounting hole bolt [3] is not recommended.




## Turnbar 2 Part No. PPP-T2

Remove existing turn pan cam.

Place turnbar on turn pan - reuse original bolt and nut in turn pan hole [1].

Position post end [2] of turnbar on curvature of outer turn pan rim then tighten bolt [1]. When necessary, reposition post by pushing bar until post end lines up on rim of turn pan as shown.

Use a center punch to indent turn pan thru turnbar extension mounting hole. Drill 5/16" hole and install bolt.

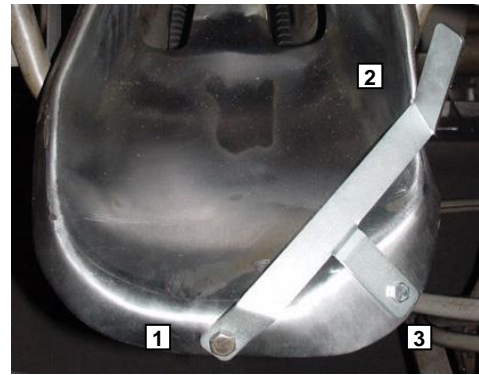

Using turnbar without extension mounting hole bolt [3] is not recommended.




## Turnbar 2 Part No. PPP-T2

Remove existing turn pan cam.

Place turnbar on turn pan - reuse original bolt and nut in turn pan hole [1].

Position post end [2] of turnbar on curvature of outer turn pan rim then tighten bolt [1]. When necessary, reposition post by pushing bar until post end lines up on rim of turn pan as shown.

Use a center punch to indent turn pan thru turnbar extension mounting hole. Drill 5/16" hole and install bolt.

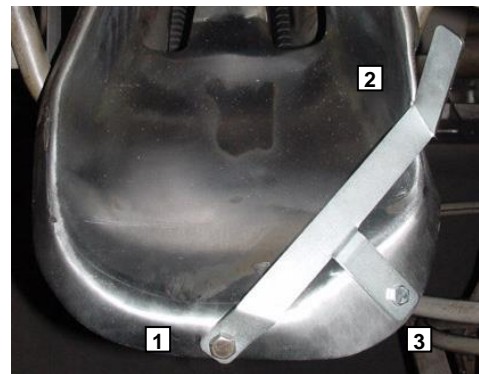

Using turnbar without extension mounting hole bolt [3] is not recommended.