



# INSTALLATION INSTRUCTIONS

PART NUMBER	164-0866
PART DESCRIPTION	TRANSFER BRUSH REPLACEMENT
REV DATE	5/28/2020
MACHINE MODELS	ALL FLEX AND IKON MODELS



Basic knowledge of the operation of the lane machine

#### TOOLS NEEDED:

7/16" Wrench

¼" Wrench

Pliers

#### PARTS INCLUDED:



#### TECHNICAL NOTE

Please thoroughly read the instructions prior to performing the installation of this assembly.

To avoid any potential problems, if at any time during the process you have a question, stop and contact our Tech Support department at the numbers listed below.

Please visit our growing library of videos to see if these instructions are available!

 [www.youtube.com/user/KegelBowling81](http://www.youtube.com/user/KegelBowling81)

#### KEGEL TECH SUPPORT:

Within USA - 1-800-280-2695

Outside USA - +1 863-734-0200

via e-mail at [LMC@Kegel.net](mailto:LMC@Kegel.net)

website [www.kegel.net](http://www.kegel.net)




1. With the machine laying in the operating position, loosen the nob for the oil tip assembly and remove it from the head and set aside for now.




2. Push the Oil Head assembly to the side panel.

3. Loosen and remove the five bolts on the front of the transfer brush with a 7/16" wrench.

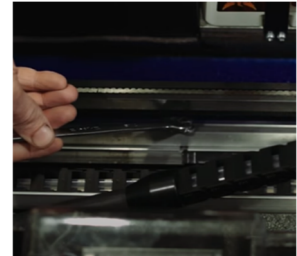

4. Remove both the block bar and the Transfer Brush assembly.

5. Place the new Transfer Brush assembly into the machine and align the holes. You can just let it lay on top of the Buffer Brush for now.

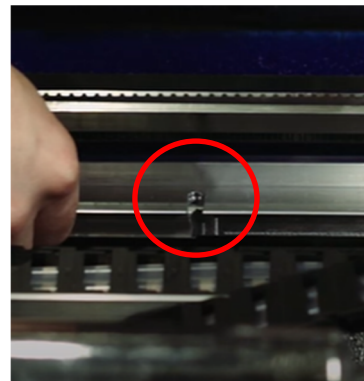

6. Take the block bar and lay on top and fasten into place.

7. Place the Oil Tip assembly back into the Oil Head assembly and fasten.

Please visit our growing library of videos to see if these instructions are available!

 [www.youtube.com/user/KegelBowling81](http://www.youtube.com/user/KegelBowling81)

**KEGEL TECH SUPPORT:**  
Within USA - 1-800-280-2695  
Outside USA - +1 863-734-0200  
via e-mail at [LMC@Kegel.net](mailto:LMC@Kegel.net)  
website [www.kegel.net](http://www.kegel.net)

